




Przekładnik prądowy z otworem na szynę i przewód ASK 63.4

Prąd wtórny [A] / Klasa dokładności



Prąd pierwotny [A]	Moc przekładnika [VA]	Prąd wtórny [A] / Klasa dokładności			
		5 A Kl. 1 Nr katalogowy	5 A Kl. 0,5 Nr katalogowy	1 A Kl. 1 Nr katalogowy	1 A Kl. 0,5 Nr katalogowy
300	1,5	25041	25011	25241	25211
	2,5	25042	25012	25242	25212
400	2,5	25043	25013	25243	25213
	5	25044	25014	25244	25214
500	5	25045	25015	25245	25215
	10	25046		25246	
600	5	25047	25017	25247	25217
	10	25048	25018	25248	25218
	15	25049		25249	
750	5	25050	25020	25250	25220
	10	25051	25021	25251	25221
	15	25052	25022	25252	25222
800	5	25053	25023	25253	25223
	10	25054	25024	25254	25224
	15	25055	25025	25255	25225
1 000	5	25056	25026	25256	25226
	10	25057	25027	25257	25227
	15	25058	25028	25258	25228
1 200	5	25059	25029	25259	25229
	10	25060	25030	25260	25230
	15	25061	25031	25261	25231
1 250	5	25062	25032	25262	25232
	10	25063	25033	25263	25233
	15	25064	25034	25264	25234
1 500	5	25065	25035	25265	25235
	10	25066	25036	25266	25236
	15	25067	25037	25267	25237
1 600	5	25068VG	25038VG		
	10	25069VG	25039VG		
	15	25070VG	25040VG		

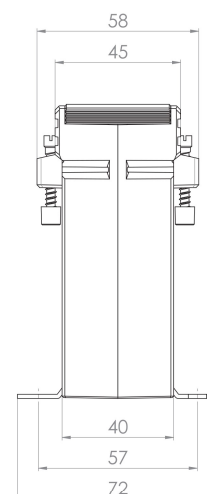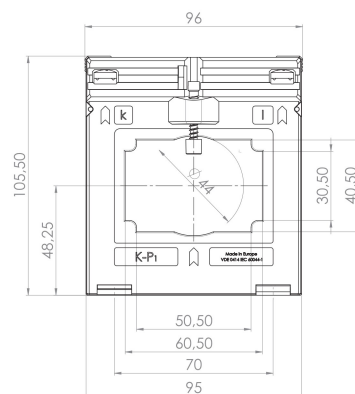

Szyna 1	60 x 30 mm
Szyna 2	50 x 40 mm
Max. średnica przewodu	44 mm
Szerokość	96 mm
Wysokość	105,5 mm
Głębokość	58 mm



Nr katalogowy

	Uchwyt do montażu na szynę DIN 35 mm	-
	Ostona do plombowania Forma C	59042