



MHT COMPACT PTC HEATERS




Features	Unit	MHT5	MHT15	MHT30
Heating Capacity*	W	5	15	30
Power supply	V	110-250V AC or DC		
Inrush current	A	1.5	2	3
Delayed fuse (advised)	A	4	4	4
Heating element type	-	PTC resistor, self regulating		
Electrical connections	-	Silicon cable, 2x0,5 mm ² , length 400 mm		
Protection class IEC	-	Class II		
Protection degree EN60529	-	IP20		
Operating temperature	°C (°F)	-45/+70 (-49/+158)		
Storage temperature	°C (°F)	-45/+80 (-49/+176)		
Radiator	-	Extruded aluminium profile, anodized		
Mounting	-	Clip for mounting on DIN rail 35 mm EN50022		
Installation position	-	Best efficiency in vertical position		
Dimensions HxWxD	mm	55x40x40	55x40x40	65x40x40
Cable length	mm	400	400	400
Weight (with packaging)	kg	0.11(0.12)	0.11(0.12)	0.13(0.14)
Conformity	-	CE		

*at 20°C (68°F) ambient temperature

Accessories

Thermostat NC 0-60°C	THR2
Double thermostat NC 0-60°C NO 0-60°	THR22
Hygrothermostat 0-60°C 30-90%RH	ETUH22
Hygrostat 10-90%RH	MUH

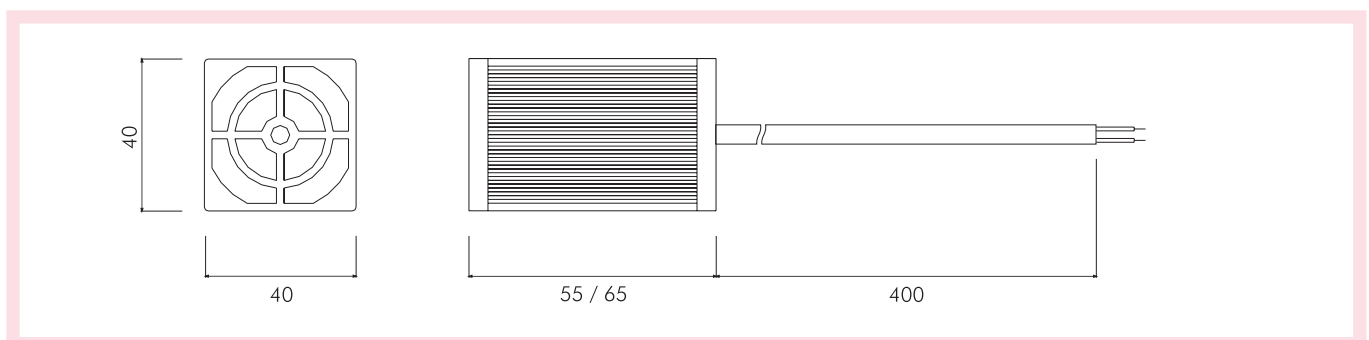

ael-cat-ep-15.01 - Specifications, values and drawings are subject to change without notice.