
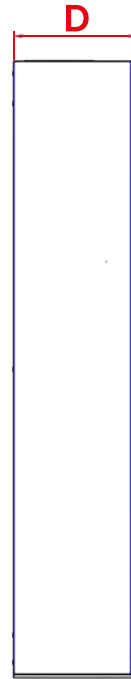
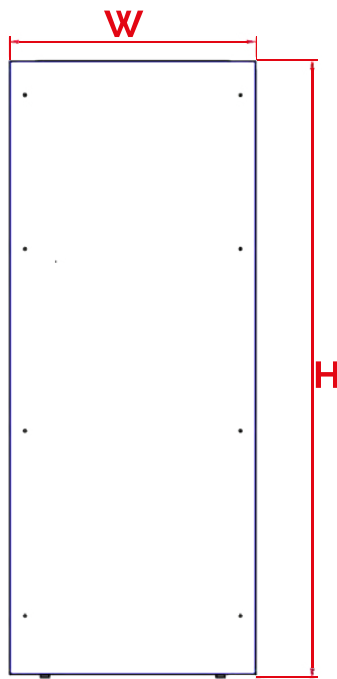


EXWAo

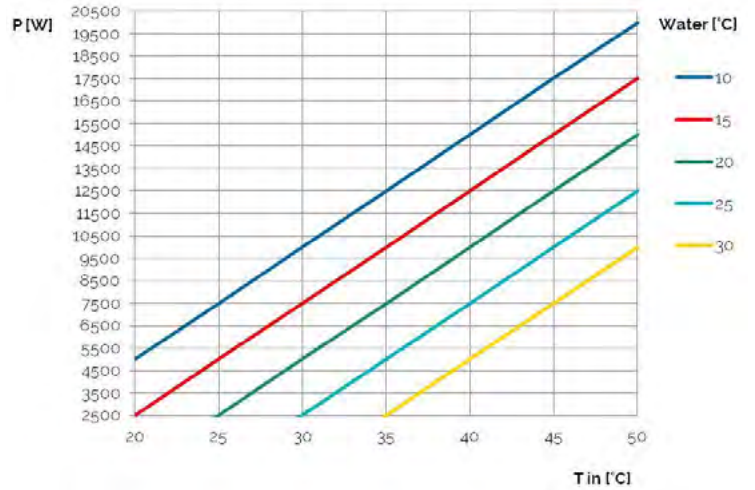

CODICE - CODE - ARTIKELNUMMER - CODIGO	M.U.	EXWA000220	EXWA000230	EXWA0U1220	EXWA0U1222
Potenza di raffreddamento - Cooling Capacity - Kälteleistung - Capacidad de refrigeración $\Delta T=25^{\circ}\text{C}$	W	12500	12500	12500	12500
UL		--	--	•	•
Alimentazione - Power Supply - Spannungsversorgung - Alimentación eléctrica	V-ph-Hz	230-1-50/60	400-2-50 440-2-60	230-1-50/60	115-1-60
Altezza / Larghezza / Profondità - Height / Width / Depth - Höhe / Breite / Tiefe - Altura / Ancho / Profundidad (HxWxD)	mm	2000x800x400	2000x800x400	2000x800x400	2000x800x400
Portata aria ventilatore - Cabinet fan flow - Luftleistung Schrankseite - Caudal del ventilador	m ³ /h	2900	2900	2900	2900
Corrente assorbita - Absorbed current - Stromaufnahme - Corriente absorbida	A	2 / 3	1 / 1,18	3	5,5
Fusibile T - T PreFuse - Absicherung - Fusibile T	A	4	4	15	15
Potenza Assorbita dal Ventilatore Absorbed fan power - Leistungsaufnahme des Lüfter - Potencia absorbida por el ventilador	W	460 / 680	460 / 680	570	390
Portata Acqua - Water flow - Wassermenge - Caudal de agua	l/h	1440	1440	1440	1440
Massima Pressione Acqua - Max water pressure - Max Wasserdruck - Presión máxima agua	kPa	1000	1000	1000	1000
Perdita di Carico - Water pressure drop - Druckverlust, Wasserseite - Pérdida de carga lato agua	kPa	90	90	90	90
Limiti Temperatura - Side cabinet temperature limits - Temperaturbereich Schrankseite - Limites temperatura lado armario	°C	+10 / +55	+10 / +55	+10 / +55	+10 / +55
Attacchi Lato Acqua Water connections diam - Wasseranschlüsse - Uniones lato agua	"	3 / 4	3 / 4	3 / 4 NPT	3 / 4 NPT
Protezione lato armadio - Cabinet Protection Degree - Schutzgrad Schrankseite - Clase de protección del armario	IP/Type	54 / -	54 / -	- / 12	- / 12
Rumorosità - Noise Level - Geräuschpegel - Nivel de ruido	dB(A)	60	60	60	60
Peso - Weight - Gewicht - Peso	kg	90	90	90	90